

NM35 Series

No Blind Spot !

Indoor NM350D-F



Outdoor NM351D-F



360° All Around View
Clear Image
Easy to Zoom-in

3 Mega pixel

Various Modes



All Around View

Guard



180° X2 Panorama



Partial Enlarge



2 partial + 360° Panorama



1 Whole + 8 partials



What is my dog doing now ?



Watch by a smart phone.

New for 360°

Remote dewarping by a mobile device such as a smart phone or PC.

Key Features

- 3Mega pixel color 1/3 CMOS sensor
- H.264 MPEG4 M-JPEG output
- corresponding to PoE/DC12V
- corresponding to ONVIF /PSIA
- Various dewarping modes
- Long life design with no moving mecha
- provide with mobile monitoring application

Utilities

- on a Table : TV conference
- under Ceiling : Pet monitoring
- on a wall : 180° view camera
- by a smart phone : remote watch


Specification

Model Name	NM350D-F Indoor type	NM351D-F outdoor type
Image Sensor	3 Mega pixel 1/3" color CMOS	
Max. Resolution	1536 x 1536	
Min. Light Required	0.5 Lux	
Digital Zoom	10X	
Event Trigger	Move detection, manual trigger etc.	
Lens	f=1.19 mm fish-eye lens, w/IR correction, F2.0	
Video Compression	H.264, MPEG4, MJPEG	
Frame Rate	max. 15fps	
Interface	10 / 100 Base-T Ethernet	
Support Protocol	TCP/IP, IPV6, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, SNMP, FTP, HTTP, HTTPs, PPPoE, UPnP, Bonjour, RTP, RTSP, RTCP, UDP, IGMP, ICMP, ARP, ONVIF, PSIA, QoS	
Internal Memory	micro SDHC / SDXC memory card slot: 1	
LAN / PoE Cable	RJ-45	
Power	PoE (IEEE802.3af Class 0) or 12VDC	
Power Consumption	12 VDC: 3.9 W / PoE: 4.5 W max.	
Operation Temperature	-10°C ~ 50°C	-40°C~60°C
Operation Humidity	20% ~ 80% (no condensation)	
Safety Regulation	CE, FCC	
Dimension (Φ x H)	140 x 50 mm	166 x 138 mm
Weight	558 g	1480 g

※ Specifications are the subject of change without any notice.

Image of 360° camera application

【 applying conventional cameras 】

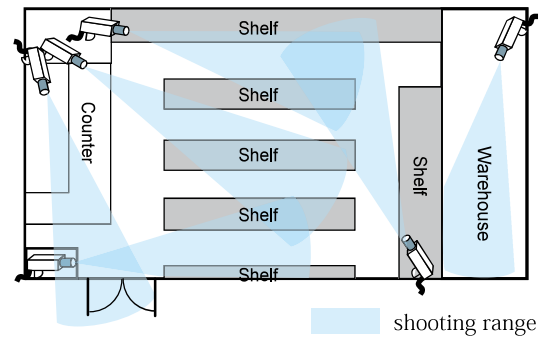

【 applying 360° cameras 】


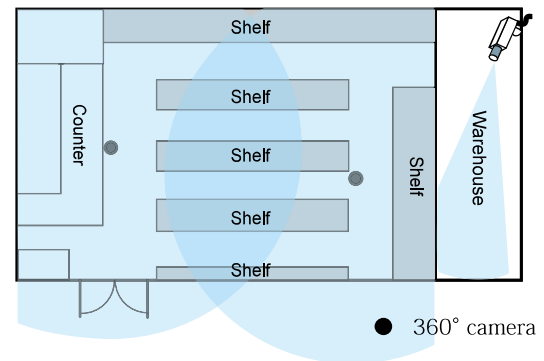


Image of Network Surveillance

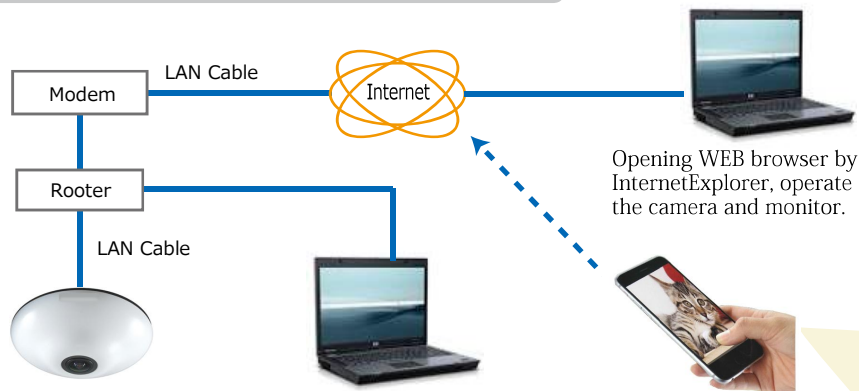


(number of simultaneous access: 10 max.)

※ A contract with a provider is required for a network access.

Opening WEB browser by Internet Explorer, operate the camera and monitor.

Monitoring by a smart phone

Applying 360° cameras can dramatically reduce No. of cameras, installation labor cost, No. of monitors, and labor for monitoring.

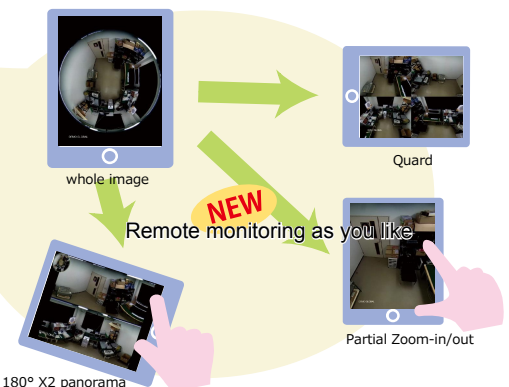

Examples of Use




Lobby, entrance of apartment



hospital, care home



security of pets



office



factory, store



parking

Provided by : **OPT Corporation**

5423-2 Miyagawa, Chino-shi, Nagano-ken 391-0013 JAPAN

Phone : +81-266-82-0020 FAX : +81-266-82-0022

<http://www.optnagano.co.jp>