



Urban Security System can be changed dramatically.




- ✗ Because the conventional narrow view angle camera and the swing head camera have blind spots, the number of the camera and the cost increases and the management of the picture becomes complicated, too.
- ✗ Filler alignment of many camera pictures is necessary for chasing a moving object.



Shooting range of a narrow view angle camera. (assum: $R=10m$)

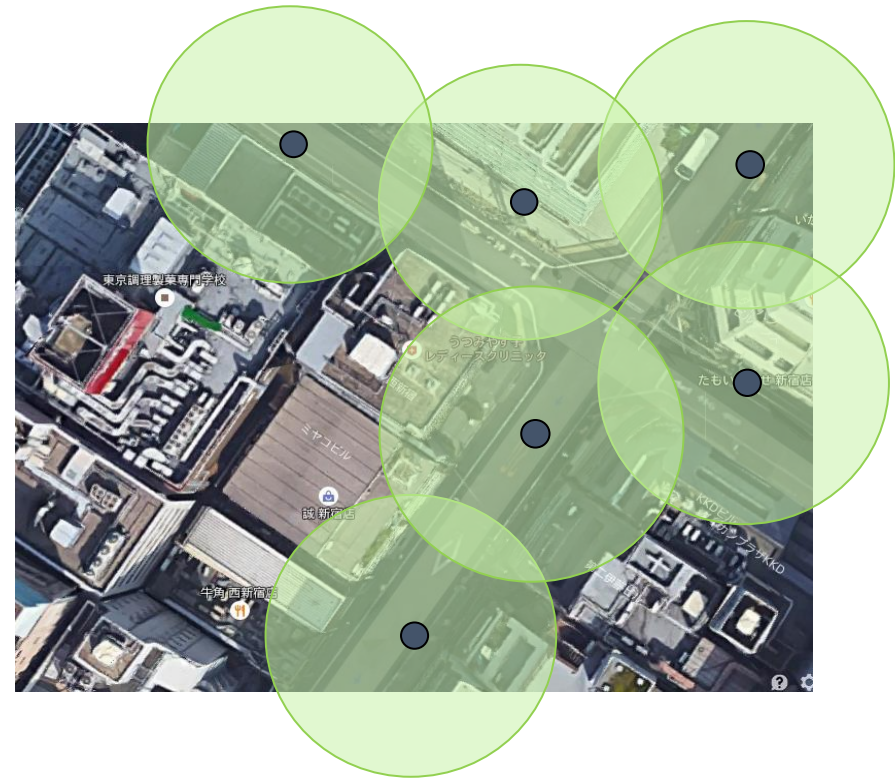

- ◎ Setting of the camera in every 50-100m radius is possible, so that the number of camera is reduced, the picture management becomes much easier, and the load of the system decreases.
- ◎ As watching at a large plane, the moving direction of the object is easily found and a chase is easy.



Shooting range of NUD360-F. (assum: $R=30m$)